

Dual Relay Input Module



Introduction

The E-PLEX® 356DRIM is a flexible input and output module consisting of 2 normally open relay outputs and 4 digital inputs. Each digital input is configurable as either active high or active low through the E-Logic software.

For output relays, status LEDs are red when relay is closed. For digital inputs, status LEDs indicate green for active high input, red for active low input.

Key Features

- ◆ 2 relay outputs
- ◆ 4 inputs, configurable as active high or low
- ◆ Output relay contacts rated for 10 amps AC or 5 amps DC
- ◆ Status LEDs for inputs and outputs


Design Specifications

- ◆ Shock : Mil Std 202 Method 213 test condition 1
- ◆ Vibration : Tested to Lloyds Register Approval Vibration Test 2
- ◆ Moisture resistance : IP66
- ◆ PCB characteristics : UL94V-0
- ◆ Ignition protection: UL 1500 compliant
- ◆ Operating Temperature: -40°C to 60°C
- ◆ Storage Temperature: -40°C to 85°C
- ◆ Operating Humidity: 0% to 100% (condensing)
- ◆ Weight: 4.8oz (136g)

Electrical Specifications

Description	Minimum	Nominal	Maximum	Absolute Max (Surge)
Voltage	7 Volts DC	12 / 24 Volts DC	32 Volts DC	45 Volts DC
Current	20 milliAmps (idle)	—	120 milliAmps (full load)	—
Input Low Threshold	0 Volts	—	0.6 Volts	—
Input High Threshold	7 Volts	—	30 Volts	—
Output Relay Contact Rating (120 / 240VAC)	—	—	10 Amps	—
Output Relay Contact Rating VDC	—	—	5 Amps	—

Typical Wiring Diagram

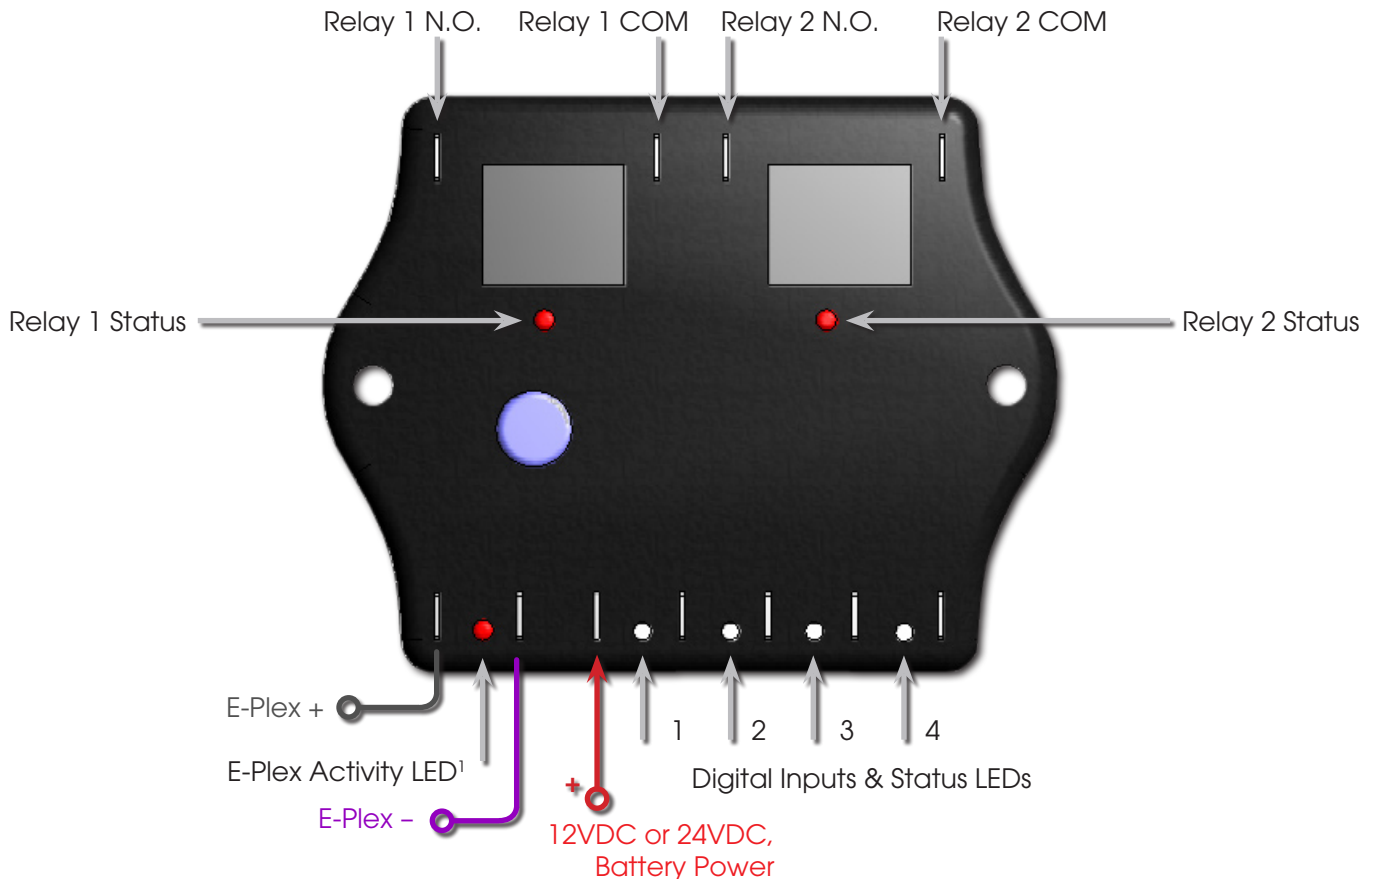

Status LEDs:

Relay 1 & 2 : ON - relay is closed, OFF - relay is open


E-Plex Activity : ON, Blinking - module is responding, OFF - module is not responding¹

Digital Inputs 1-4 : GREEN - input is high, RED - input is low

NOTES:

1. LED will be off if system is not functioning or present, however, modules in the system may still be responding.

Dimensional Specifications

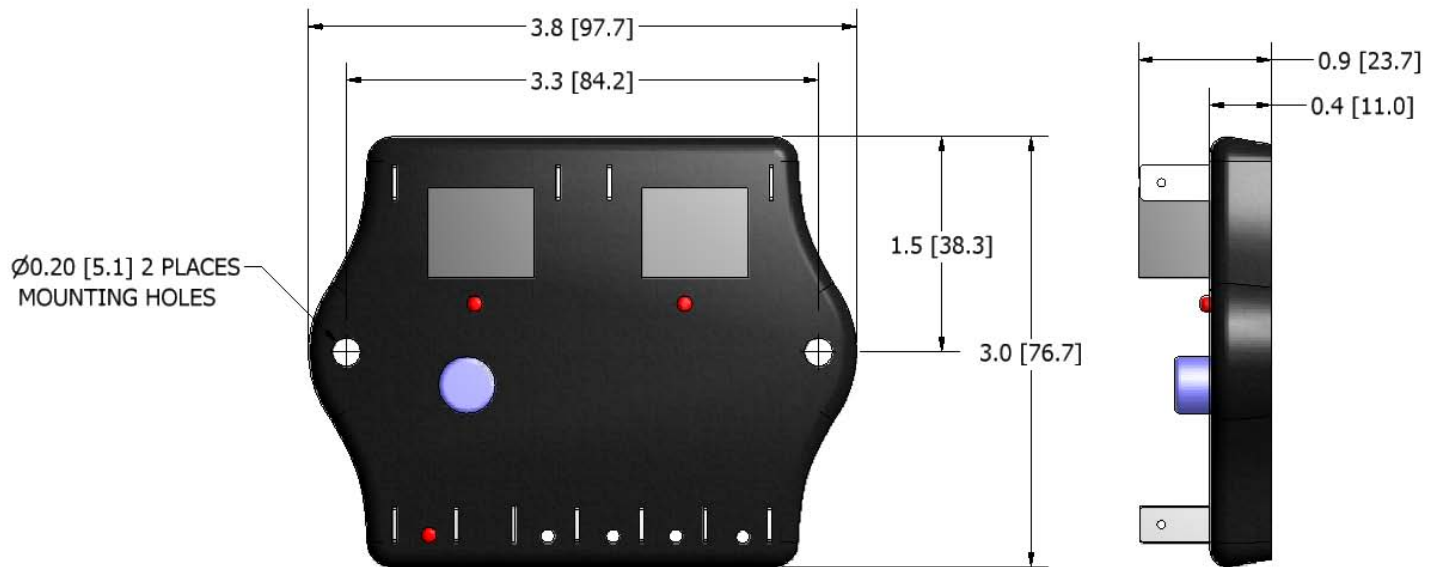

Mounting Specifications

Screw assembly to a flat mounting surface in 2 places, as shown in the illustration.

Mounting Instructions

Imperial (English) fasteners: Use #10 size screw, #10 split lock washer, #10 washer. Torque to 20~22 in-lb. Do not exceed this torque as it could cause damage to the electronics.

Metric fasteners: Use M5 size screw, M5 split lock washer and M5 washer. Torque to 250~280 N-cm. Do not exceed this torque as it could cause damage to the electronics.

Ordering Information

Description	E-PLEX® Part Number
356DRIM Series - Dual Relay Input Module	356DRIM

